


SINGLE-SIZE RATCHET WRENCH (Heavy duty type)



(Excellent rust proofing)
Cation paint

RH 10 ~ 46


Can be turned over for use in clockwise or counter clockwise directions.
The rough gear pitch of the socket enables quick tightening.
17 sizes of the single socket type (plunger type) are available to cover a variety of uses.

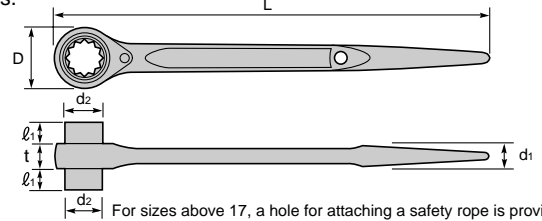

For sizes above 17, a hole for attaching a safety rope is provided
(Unit: mm)

Item No.	Size	L	D	d ₁	d ₂	t	ℓ ₁	Weight (g)	Remarks
RH 10	10	225	28	11	15	12	8	130	
RH 12	12	225	28	11	18	12	8	130	
RH 13	13	225	28	11	18	12	9	140	
RH 14	14	225	28	11	19	12	9	140	
RH 17	17	290	37	14	23	15	11	270	
RH 19	19	290	37	14	26	15	11	280	
RH 21	21	335	46	17	28	16	12	410	
RH 22	22	335	46	17	30	16	12	420	
RH 24	24	335	46	17	32	16	12	430	
RH 26	26	355	51	19	35	16	13	520	
RH 27	27	355	51	19	36	16	13	520	
RH 30	30	400	59	23	41	18	18	750	
RH 32	32	400	59	23	43	18	18	920	
RH 35	35	445	66	25	47	19	22	1,220	
RH 36	36	445	66	25	49	19	22	1,350	
RH 41	41	490	75	30	55	21	26	1,750	
RH 46	46	500	84	30	61	22	24	2,100	


SINGLE-SIZE RATCHET WRENCH (Reversible claw type)

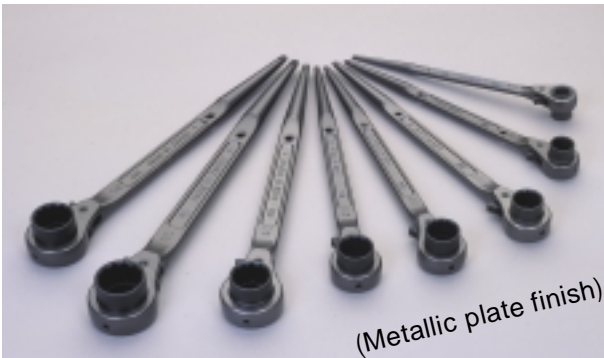

(Metallic plate finish)

RN 10 ~ 46

This wrench is optimal for tightening in narrow spaces as the socket extends from only one side.
There are 17 sizes available with the Reversible claw type ratchet wrench to cover a variety of use.

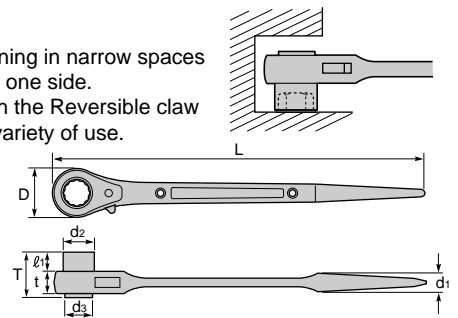

For sizes above 19mm, a hole for attaching a safety rope is provided.

(Unit: mm)

Item No.	Size	L	D	d ₁	d ₂	d ₃	T	t	ℓ ₁	Weight (g)	Remarks
RN 10	10	225	28	11	15	18	26	14	10	170	
RN 12	12	225	28	11	18	18	26	14	10	180	
RN 13	13	225	28	11	18	18	26	14	10	180	
RN 14	14	225	28	11	19	18	26	14	10	180	
RN 17	17	270	34	12	23	19	32	16	14.5	300	
RN 19	19	310	41	15	26	26	36	18	16	380	
RN 21	21	310	41	15	28	26	36	18	16	460	
RN 22	22	310	42	15	30	26	36	18	16	480	
RN 24	24	355	49	19	32	31	40	20	18	650	
RN 26	26	355	49	19	35	31	40	20	18	680	
RN 27	27	355	51	19	36	32	40	20	18	710	
RN 30	30	400	62	23	41	41	44	22	20.5	1,100	
RN 32	32	400	62	23	43	41	44	22	20.5	1,150	
RN 35	35	445	67	25	47	43	47	24	21.5	1,250	
RN 36	36	445	67	25	49	43	47	24	21.5	1,250	
RN 41	41	490	76	30	55	49	52	26	24	1,850	
RN 46	46	500	83	30	61	55	54	29	24	2,250	