




SHOCK SPEED PULLER SET (Professional use heavy duty type)

SSP 5 ~ 18

- SSP5 ~ 12 in steel case.
- SSP15,18 in wooden frame case.

Examples of use

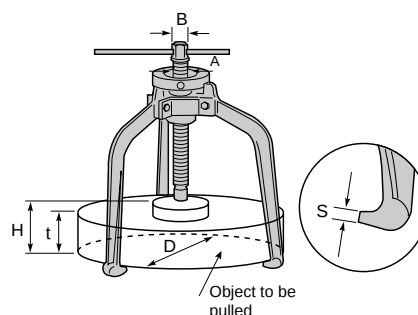

- Pulling is enabled by hitting baked or rusted forcing screws with a hammer (No other pullers have this function).

(Unit : mm)

Item No.	D		t	H	S	B	A	Breaking load (kN)	Weight (kg)	Applicable adaptor	Remarks
	Minimum	Maximum	When D is maximum								
SSP 5	55	125	125	140	5	19	18	50	3	GA6N	
SSP 8	80	200	175	200	7	22	22	100	6	GA8N	
SSP 12	120	300	225	270	9	32	32	200	17	GA12N	
SSP 15	150	375	250	290	10	41	38	250	35	GA18N	
SSP 18	180	450	275	320	11	46	44	300	48	GA24NK	

Accessories

Super head spanner(SSP5 ~ 8) • Hexagonal key wrench(All sizes) • Single-size ratchet wrench with grip (SSP12 ~ 18) • GP Oil (15g) : All sizes
H indicates the dimension when the forcing screw is lifted to the maximum point.

PARTS for Shock speed puller



SPSR 5 ~ 18


SPJ 5 ~ 18

Forcing screw and nut (with adaptor)

Item No.	Applicable adaptor	Remarks
SPSR 5	GA 6N	
SPSR 8	GA 8N	
SPSR 12	GA 12N	
SPSR 15	GA 18N	
SPSR 18	GA 24NK	

Claw (One piece)

Item No.	Remarks
SPJ 5	
SPJ 8	
SPJ 12	
SPJ 15	
SPJ 18	

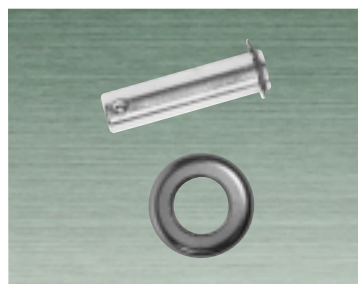

SPN 5 ~ 18

SPA 5 ~ 18

Pin (One piece)

Item No.	Remarks
SPN 5	
SPN 8	
SPN 12	
SPN 15	
SPN 18	

Adjustable screw

Item No.	Remarks
SPA 5	
SPA 8	
SPA 12	
SPA 15	
SPA 18	



SPB 5 ~ 18

SPH 5 ~ 18

SPU 5 ~ 18

Body

Item No.	Remarks
SPB 5	
SPB 8	
SPB 12	
SPB 15	
SPB 18	

Supplementary adaptor with step

Item No.	Remarks
SPH 5	
SPH 8	
SPH 12	
SPH 15	
SPH 18	

Handle

Item No.	Remarks
SPU 5	
SPU 8	
SPU 12	
SPU 15	
SPU 18	