



VERTICAL LIFTING CLAMP (Lock lever type)



SVC 0.5L ~ 5L

Vertical lifting clamp for the lifting of steel plates and steel structures.



Equipped with Remote control and releasing mechanisms

FEATURES


- The spring-loaded tightening lock mechanism assures a positive initial clamping force.
- With the use of a remote control lever and rope, which are supplied with the clamp, the clamp can be unlocked from the floor to detach from the work piece.
- The clamping force increases in proportion to the weight of the load.
- The main body and the shackle are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- High-frequency quenching of die-forged special alloy steels gives greater durability to the cam.
- The main body is a baked-on finish.

SPECIFICATIONS

| Item No. | Rated capacity (ton) | Jaw opening (mm) | Weight (kg) | Remarks |
|----------|----------------------|------------------|-------------|---------|
| SVC 0.5L | 0.5 | 0 ~ 19 | 3 | |
| SVC 1L | 1 | 0 ~ 25 | 6 | |
| SVC 2L | 2 | 0 ~ 30 | 10.5 | |
| SVC 3L | 3 | 0 ~ 35 | 12.5 | |
| SVC 5L | 5 | 0 ~ 40 | 21.5 | |


LIFTING CLAMPS FOR STEEL

TIGHTENING LOCK MECHANISM



(Tightening)


The clamp will lock onto the work piece when the lock lever is pulled completely upwards as shown in the drawing. When locked, the shock from the work piece coming to rest on the floor or the slackening of the sling rope will not cause the clamp to come lose from the work piece.




(Releasing)

The clamp will unlock and the cam will retreat into the body when the lock handle is pulled completely downwards as shown in the drawing. When the clamp is high out of reach, the clamp can be unlocked via the remote control unlocking lever and rope.

EXAMPLES OF USE

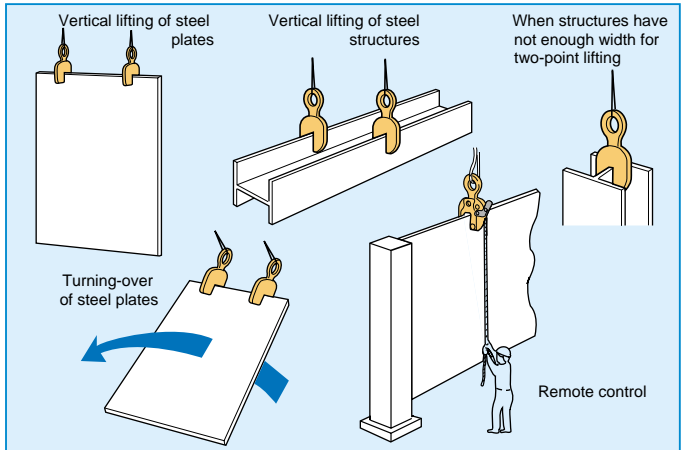

⚠ Always lift work pieces at 2 or more points for safety.

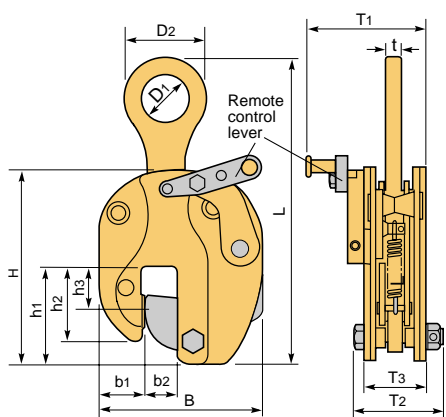

DIMENSIONS TABLE

(Unit:mm)

| Item No. | L (MAX) | H | h1 | h2 | h3 | B | b1 | b2 | D1 | D2 | T1 | T2 | T3 | t |
|----------|---------|-----|-----|----|----|-----|----|----|----|-----|----------|-----|----|----|
| SVC 0.5L | 250 | 158 | 80 | 60 | 36 | 131 | 36 | 26 | 36 | 64 | 89(80) | 67 | 49 | 12 |
| SVC 1L | 310 | 185 | 90 | 69 | 45 | 151 | 42 | 32 | 48 | 85 | 113(104) | 81 | 59 | 16 |
| SVC 2L | 375 | 210 | 100 | 77 | 47 | 172 | 48 | 39 | 60 | 106 | 130(118) | 97 | 71 | 18 |
| SVC 3L | 405 | 225 | 105 | 81 | 47 | 182 | 51 | 42 | 66 | 117 | 141(129) | 102 | 75 | 20 |
| SVC 5L | 455 | 260 | 120 | 95 | 49 | 220 | 65 | 50 | 84 | 148 | 157(145) | 122 | 92 | 22 |

When the remote control unlocking levers are not installed, refer to the values in the above table for T1 shown in parenthesis.
The main bodies of SVC-5L is made of high-tensile steel plates.