

SUPER LOCK HOOK (with Swivel)



SLH2S•3S

Optimal for lifting road plate and for safety hooking.

FEATURES

Optimal for laying and removing road plate, and for lifting wire ropes and sling belts. The Hook is attached with a swivel eye and so has a good torsibility of wire rope, thereby preventing the turning of road plate.

The mouth is wide enough for easy hooking and disengagement.

When lifting the work, closing lock is automatically engaged to ensure safety. The main body and the shackle are made of special alloy steel molded and forged, whose optimal heat treatment ensures rigidity and superb durability. The main body is of baking finish.

EXAMPLES OF USE




Laying and removing of road plate



For direct slinging as a safety Hook

The diameter of the hole and the thickness of road plate to be applied to shall be within the ranges stated in the drawing on the right.

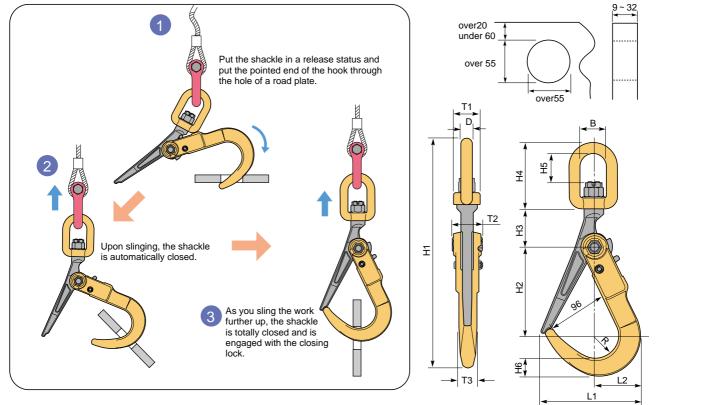

SPECIFICATIONS • DIMENSIONS TABLE (Unit:mm) Weight (kg) Remarks T_2 Item No. H₁ H₂ H4 Нs I 1 12 T1 Τз в D R Rated capacity (ton) Ηз H₆ 4.0 30 166 75 29 SLH 2S 2 402 19 38 147 70 117 50 46 54 47 4.2 SLH 3S 3 405 33 169 78 31