MOVABLE TELESCOPE TYPE PAT.

JBC 1020N · 2020N

Universal-joint type

Feature

You can freely move the crane on casters anywhere.

Lifting height is freely adjustable by the winch operation.

When in use, the outriggers are extended in the four different directions, so the crane will be well founded, enabling the execution of work with stability and safety.

Adaptive to Clean Room specifications

The central joint of the arm can be turned 180 degrees to the right or to the left, effectively securing a wide range of working area.

When there is no obstacle around, it is possible to turn the arm for 360 degrees, which provides a wide range of working area.




Easy to extend and contract and move.


1987

When carrying the crane to any other place, never fail to fold the arm and fix it temporarily.

Do not move the crane with a work lifted

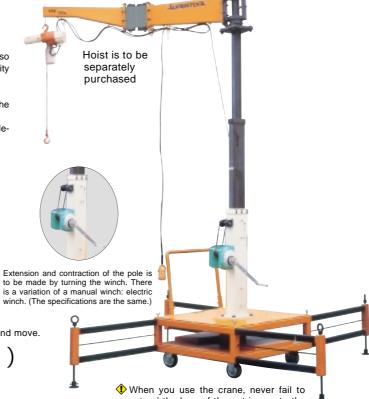


When you use the crane, never fail to extend the legs of the outriggers to the four different directions so as to provide stability.

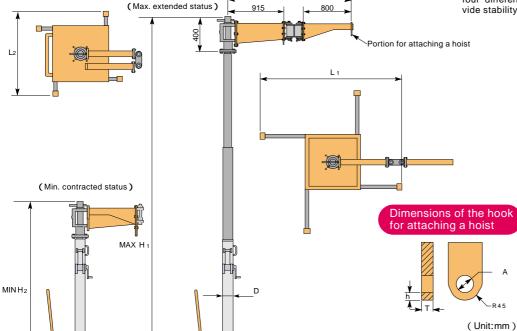

Example of use



This type of crane can be freely extendable, so it is very convenient for raising the work to a higher place. This type of crane is very useful in lifting not only of products and workpieces, but also of welding machines, tools, etc.



In case of a forklift, it has to get around an obstacle in front of it, while the jib crane makes it possible for the work to be carried to another place over the obstacle, so the latter is more excellent in use.

SPECIFICATIONS DIMENSIONS TABLE

SPECIFICATIONS DIMENSIONS TABLE (Unit:mm)										
Item No.	Rated capacity (kg)	Lifting height (m)	L ₁	L2	MAX. H1	MIN. H2	D	F	Weight (kg)	Remarks
JBC 1020N	100	1.6 ~ 3.0	2,110	1,000	3,523	1,918	150	406	469	
JBC 2020N	200	1.6 ~ 3.0	2,710	1,200	3,573	1,968	175	456	669	

	Equipment with a load sensor						
	Item No.	New series					
	JBC 1020NS						
	JBC 2020NS						
-1	d products seeming to the monde						

Apart from the indicated specifications, we will provide custom-ordered products according to the user's needs. You will be separately charged for freight and installation.

10 | 15

h

Α

60 10 15

100kg

200kg