


GEAR WRENCH, Straight Type

(mm)

Item No.	Size	L	S	D	T1	T2	N.W. (g)
GRW 8	8	140	16.0	17.0	4.5	6.5	35
GRW10	10	160	21.0	20.0	5.0	7.5	50
GRW12	12	171	24.5	23.0	5.5	8.5	75
GRW13	13	178	26.5	25.0	6.0	8.5	80
GRW14	14	191	28.5	27.0	6.5	9.0	105
GRW15	15	200	31.0	28.5	7.0	9.5	125
GRW17	17	225	34.5	31.5	7.5	10.5	165
GRW19	19	245	39.0	35.5	8.0	11.5	210
GRW21	21	290	45.0	40.5	9.0	13.0	340
GRW22	22	290	45.5	42.0	9.0	13.0	345
GRW24	24	335	51.5	47.0	10.0	14.5	515



GRW17

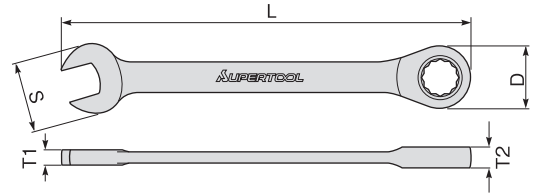

Uses

- Electric wire, piping and air conditioner
- Machinery equipment
- Automobile repair
- Suitable for any work in confined spaces.
- 72 teeth ratchet with 5° of sweep suitably used for confined areas.
- Can be used for final tightening.
- Titanium plating at gear part of the socket.


GEAR WRENCH, Flex Type

(mm)

Item No.	Size	L	S	D	T1	T2	N.W. (g)
GRW 8F	8	140	16.5	17.0	5.0	6.5	40
GRW10F	10	160	20.0	20.5	5.5	7.5	55
GRW12F	12	171	24.0	22.5	6.0	8.0	85
GRW13F	13	180	26.5	24.5	7.0	8.5	100
GRW14F	14	191	28.5	27.5	7.0	9.0	120
GRW15F	15	199	29.0	28.0	7.5	9.5	135
GRW17F	17	226	35.0	32.0	8.0	10.5	190
GRW19F	19	246	38.5	34.0	8.5	11.5	245
GRW21F	21	290	45.0	41.0	9.5	13.0	395
GRW22F	22	290	45.0	41.0	9.5	13.0	385
GRW24F	24	331	51.0	47.5	10.0	14.5	550



GRW17F

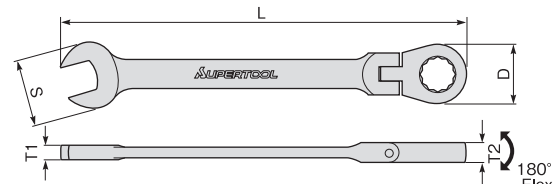

Uses

- Electric wire, piping and air conditioner
- Machinery equipment
- Automobile repair
- Suitable for any work in confined spaces.
- 72 teeth ratchet with 5° of sweep suitably used for confined areas.
- Convenient flexible socket head.
- Can be used for final tightening.
- Titanium plating at gear part of the socket.


GEAR WRENCH, Straight Short Type

(mm)

Item No.	Size	L	S	D	T1	T2	N.W. (g)
GRW 8S	8	90	19	19	4.5	6.5	35
GRW 10S	10	95	23	20	5.0	7.5	45
GRW 12S	12	110	24	26	5.5	8.5	75
GRW 13S	13	110	29	26	6.0	8.5	80
GRW 14S	14	115	30	29	6.5	9.0	95
GRW 17S	17	128	36	32	7.5	10.5	120
GRW 19S	19	138	40	35	8.0	11.5	155



GRW 17S

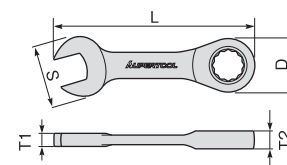

Uses

- Electric wire, piping and air conditioner
- Machinery equipment
- Automobile repair
- Suitable for any work in confined spaces.
- 72 teeth ratchet with 5° of sweep suitably used for confined areas.
- Can be used for final tightening.
- Titanium plating at gear part of the socket.