

Automatic Releasing System


SLH3A

SUPER LOCK HOOK (Open / Close Lock Type)

CHECK!





PDF of Catalogue

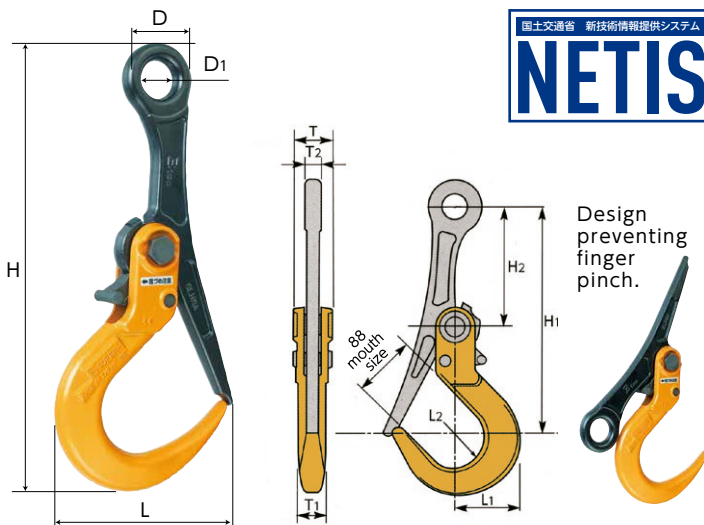

Example of use

Laying and removing road plates

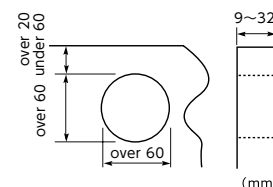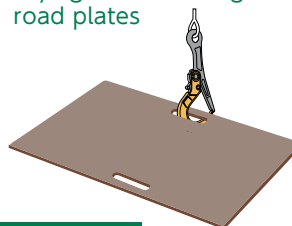

⚠ The applicable road plate thickness and hole dimensions shall be within the ranges of the drawing and the chart.

Features

- During lifting, the close lock is automatically set so that the load can be lifted safely without coming off.
- When removing the hook, as a lever enables to set an open lock, removing the hook from works like a crane for instance is very easy.
- The hook mouth opens widely, making load set or remove operation very simple.

Turning the shackle and close the mouth will lock the hook automatically.


When lifting in this position, the shackle turns only to the closing direction.

State with the open lock set.




Open lock mechanism


1) Take down the load




2) Push down the lever, turn the lever until the end and release the lever.



3) The open lock gets set and the shackle stays open.



4) Just by lifting it, the hook comes off automatically. (Be careful of the hook swing at the moment it comes off.)




Item No.	Rated capacity (ton)	Size (mm)											N.W. (kg)
		L	L1	H	H1	H2	D	D1	R	T	T1	T2	
SLH3A	3	169	78	383	280	145	64	32	38	54	33	18	3.8

For Extra Safety

SLH3AC

SUPER LOCK HOOK WITH CHAIN SLING (Open / Close Lock Type)



Features

- Chain slings can be used safely for a longer time than wire ropes.
- Including a tag showing the serial number and the rated capacity for control.
- When removing the hook, as a lever enables to set an open lock, removing the hook from works like a crane for instance is very easy.

Size of master link

- Inner diameter: 70×140 mm
- Wire diameter of master link: $\phi 19$ mm



Item No.	Rated capacity (ton)	Set details		L (mm)	N.W. (kg)
		Super lock hook item No.	Chain item No.		
SLH3AC	3	SLH3A	CSC31	1,391	7.3