


» Swivel Type

SLH-S

SUPER LOCK HOOK

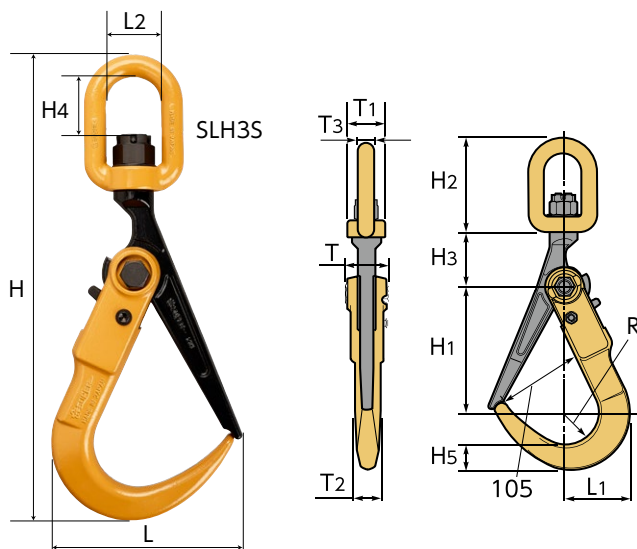



Example of use

Laying and removing road plates



- As a safety hook for direct lifting



 The applicable road plate thickness and hole dimensions shall be within the ranges of the drawing and the chart.

Features


- The swivel eye bolt included enables smooth returning of wire rope, thereby preventing the road plate from turning.

Item No.	Rated capacity (ton)	Size (mm)														N.W. (kg)
		H	H1	H2	H3	H4	H5	L	L1	L2	R	T	T1	T2	T3	
SLH2S	2	402	147	117	70	50	30	166	75	47	38	54	46	29	19	4.2
SLH3S	3	405					33	169	78					31		4.5

>> For Extra Safety

SLH-SC

**SUPER LOCK HOOK
WITH CHAIN SLING (with Swivel)**



- Size of master link
- Inner diameter:
70×140 mm
- Wire diameter of
master link: $\phi 19$ mm



Features


- Chain slings can be used safely for a longer time than wire ropes.
- Including a tag showing the serial number and the rated capacity for control.
- The swivel eye bolt included enables smooth returning of the chain, thereby preventing the road plate from turning.

Item No.	Rated capacity (ton)	Set details		L (mm)	N.W. (kg)
		Super lock hook item No.	Chain item No.		
SLH2SC	2	SLH2S	CSC31	1,407	7.7
SLH3SC	3	SLH3S	CSC31	1,410	8.0

» Light Weight & High Durability

CSC31

CHAIN SLING

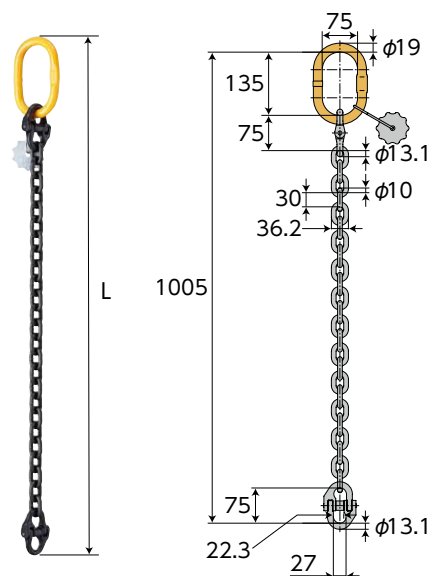

Features

- Convenient for using directly with our super lock hooks.
- Our chain slings are based on JISV class, making them light-weight and strong.

Item No.	Rated capacity(ton)	L (mm)	N.W. (kg)
CSC31	3	1,037	3.5