

» For ALC Panel


PAC260

LIFTING CLAMP FOR ALC PANEL

CHECK!




Operation manual & parts drawing

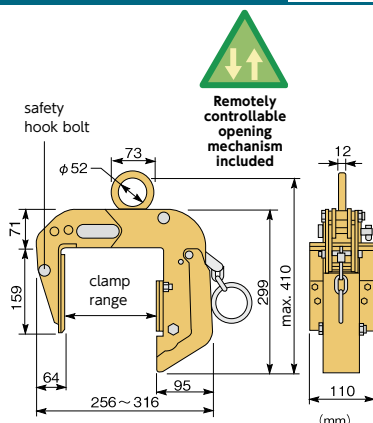


Item No.	Rated capacity (kg)	Clamp range - 3 steps adjustment (mm)	N.W. (kg)
PAC260	260	90~105	6.9
		115~130	
		140~155	

Example of use ⚠ Always use this clamp in pair.

■ Holding longer side



■ Holding shorter side



Feature

- Clamp dedicated for lifting ALC panels.
- ▶ **Common features for PAC260 and PSC260**
- The spring-type tightening lock mechanism assures a positive initial clamp force.
- Including a mechanism making that the clamping force increases in proportion to the load weight.
- The tightening lock can be released remotely, avoiding dangerous operations in high places.
- The urethane pad with spikes on one side ensures a firm grip, for even safer operation.
- The two pads come with urethane rubber to prevent scratches on the panel surface.
- A safety hook bolt for setting a sling belt is included to provide extra safety.

Accessories

- Rope for remote control (2m) included

» For Extruded Cement Panel


PSC260

LIFTING CLAMP FOR EXTRUDED CEMENT PANEL

CHECK!




Operation manual & parts drawing

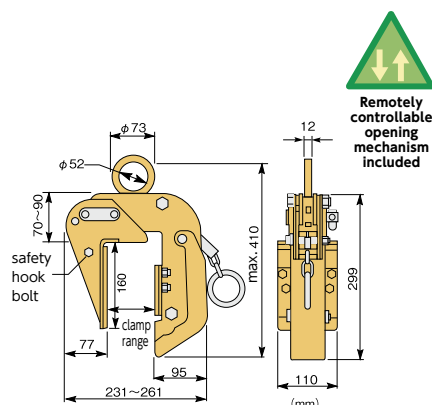


Example of use ⚠ Always use this clamp in pair.

■ Holding longer side



■ Holding shorter side



Feature

- Ideal for lifting and installing extruded cement panels.
- ▶ The other features and the examples of use are the same as for PAC260.

Item No.	Rated capacity (kg)	Clamp range - 2 steps adjustment (mm)	N.W. (kg)
PSC260	260	50~65	6.9
		70~85	

Accessories

- Rope for remote control (2m) included

» Easy Operation


UGC200W

HORIZONTAL LIFTING CLAMP FOR ALC PANEL

CHECK!



Operation manual & parts drawing

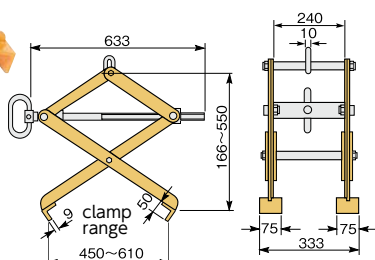

Example of use ⚠ Lift with one clamp.



Features

- Ideal for lifting and installing ALC panels.
- Easy to transport and install floor panels and lids for U shaped gutters with one operator.
- Clamping range can be adjusted to the width of the workpiece by turning the handle.
- The firm clamping of the workpiece with a screw tightening lock ensures the operation safety.

Item No.	Rated capacity (kg)	Clamp range (mm)	N.W. (kg)
UGC200W	200	450~610	18