

Tスロットナット


T-SLOT NUT

(mm)

品番	テーブル スロット	ねじ径	A	B	C	T	L	質量 (g)	メーカー希望 小売価格
1008TN	10	M 8	16	6	12	10	23	22	350
1210TN	12	M10	18	7	14	12	23	29	360
1410TN	14	M10	22.3	8.8	15.9	14	28	54	420
1412TN		M12	22.3	8.8	15.9		28	50	450
1612TN	16	M12	25.5	8.8	15.9	16	28	61	480
1614TN		M14	25.5	8.8	15.9		28	57	480
1814TN	18	M14	28.6	11.1	19.1	18	30	85	510
1816TN		M16	28.6	11.1	19.1		30	79	550
2016TN	20	M16	31.8	11.8	19.1	20	30	92	650
2018TN		M18	31.8	14.1	25.5		38	155	740
2216TN	22	M16	36.1	14.1	25.5	22	38	187	910
2218TN		M18	36.1	14.1	25.5		38	179	910
2220TN		M20	36.1	14.1	25.5		38	167	940
2418TN	24	M18	38.3	14.1	25.1	24	38	192	1,000
2420TN		M20	38.3	14.1	25.1		38	181	1,060
2620TN	26	M20	41.3	16.1	25.5	26	44	250	1,220
2622TN		M22	41.3	16.1	25.5		44	237	1,250
2822TN	28	M22	41.3	17.4	28.6	28	50	318	1,510
2824TN		M24	41.3	17.4	28.6		50	305	1,570



- 材 質 S45C
- 熱処理 焼入 23~31HRC
- 仕 上 黒染
- ボルトが突き出て機械テーブルを傷めないようカシメ加工をしています。

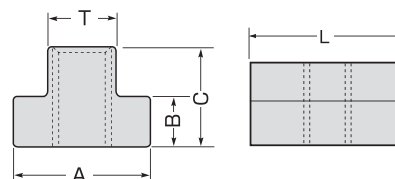


(mm)

品番	テーブル スロット	ねじ径	A	B	C	T	L	質量 (g)	メーカー希望 小売価格
FTS810	10	M 8	15	6	12	10	19	22	420
FTS1012	12	M10	18	7	14	12	23	29	480
FTS1014	14	M10	22	8	16	14	26	48	520
FTS1214	14	M12	22	8	16	14	26	45	570
FTS1215	15	M12	25	9	18	15	29	65	640
FTS1216	16	M12	25	9	18	16	29	67	650
FTS1416	16	M14	25	9	18	16	29	62	650
FTS1418	18	M14	28	10	20	18	32	92	710
FTS1618	18	M16	28	10	20	18	32	84	770
FTS1619	19	M16	32	12	24	19	36	135	810
FTS1620	20	M16	32	12	24	20	36	138	960
FTS1820	20	M18	32	12	24	20	36	130	1,000
FTS1822	22	M18	36	14	28	22	40	200	1,060
FTS1824	24	M18	40	16	32	24	44	285	1,160
FTS2022	22	M20	36	14	28	22	40	189	1,220
FTS2023	23	M20	40	16	32	23	44	271	1,360
FTS2024	24	M20	40	16	32	24	44	277	1,440
FTS2026	26	M20	42	14	25	26	46	255	1,520
FTS2226	26	M22	42	14	25	26	46	240	1,600
FTS2228	28	M22	45	18	36	28	49	400	1,780
FTS2428	28	M24	45	18	36	28	49	385	1,930
FTS2432	32	M24	50	20	40	32	54	690	1,930



- 材 質 S45C
- 熱処理 焼入 23~31HRC
- 仕 上 黒染
- ボルトが突き出て機械テーブルを傷めないようカシメ加工をしています。

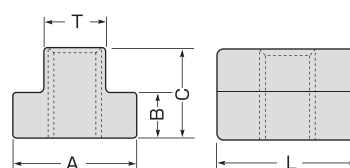

ダブルTスロットナット

DOUBLE T-SLOT NUT

(mm)

品番	テーブル スロット	ねじ径	A	B	C	D	T	L	質量 (g)	メーカー希望 小売価格
1412WTN	14	M12	22.2	8.7	15.8	22	13.8	45	80	910
1612WTN	16	M12	25.4	8.7	15.8	22	15.8	45	90	930
1812WTN	18	M12	28.5	11.1	19	22	17.5	45	130	1,030
1816WTN	18	M16	28.5	11.1	19	30	17.5	55	140	1,160
2016WTN	20	M16	31.7	11.9	19	30	19	55	150	1,250
2220WTN	22	M20	36	13.8	25.4	40	21.7	70	290	1,810
2420WTN	24	M20	38.2	14	25.4	40	23.5	70	320	1,830



- 材 質 S45C
- 熱処理 焼入 23~31HRC
- 仕 上 黒染

