



BALANCE (Customized products)

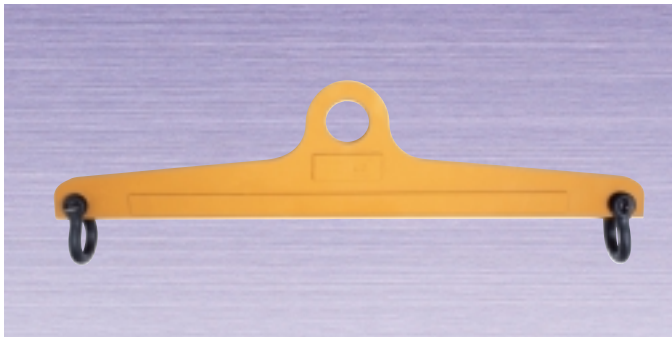

LSB 11 ~ 52.5

Balance designed for long work pieces.

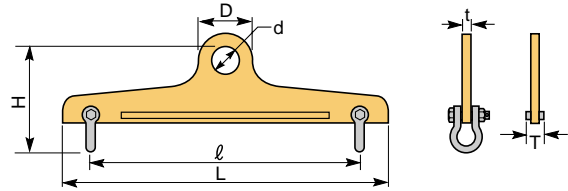

From our wide selection of balances, determine the most suitable balance from the length of the steel plate or work piece

SPECIFICATIONS • DIMENSIONS TABLE

(Unit:mm)

Item No.	Rated capacity (ton)	L	l	H	D	d	T	t	Shackle (JIS B2801)	Weight (kg)	Remarks
LSB 11	1	1072	1000	220	110	60	31	19		18	
LSB 11.5		1572	1500	240						30	
LSB 12		2072	2000	260						42	
LSB 1.5 1	1.5	1080	1000	250	130	70	34	22		23	
LSB 1.5 2		2080	2000	285						52	
LSB 1.5 2.5		2580	2500	315						75	
LSB 2 1	2	1090	1000	287	150	80	37	25		30	
LSB 2 2		2090	2000	337						68	
LSB 2 2.5		2590	2500	357						92	
LSB 3 1	3	1100	1000	324	180	90	40	28		40	
LSB 3 2		2100	2000	379						90	
LSB 3 2.5		2600	2500	404						120	
LSB 5 1	5	1130	1000	376	210	100	48	36		60	
LSB 5 2		2130	2000	441						130	
LSB 5 2.5		2630	2500	471						175	

SWIVEL SHACKLE




SBS 1 • 3

Special alloy steels give higher strength to the swivel shackle
Optimised to prevent various wire and chain from being warped


FEATURES

- The main body and the parts are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- The main body was baked-on finished for rust-proofing

CAUTION: This product is not insulated. Do not use for electrical welding.



EXAMPLES OF USE

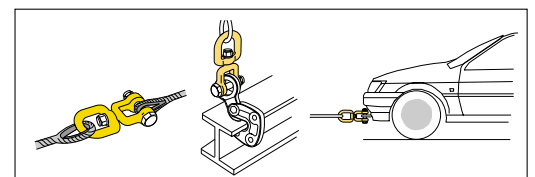

SPECIFICATIONS • DIMENSIONS TABLE

(Unit:mm)

Item No.	Rated capacity (ton)	H	H ₂	h ₁	h ₂	B ₁	B ₂	b ₁	b ₂	T	D	d	Weight (kg)	Remarks
SBS 1	1	158	119.5	35	39	63	53	37	27	13	35	16	1.7	
SBS 3	3	227	173.5	50	60	85	73	47	35	19	47	22	2.4	